



KWIKFLEX Specification Sheets

Kwikflex® NMLT Multi-Angle Conduit Connectors


FEATURES & BENEFITS

- Listed under the Underwriter's Laboratories
- Available in 1/2" and 3/4" sizes
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents
- No disassembly required. Instead, the installer simply pushes the conduit or tubing onto the ferrule, tightening the domed sealing nut. The completed assembly can then be secured in the chassis by the locknut (or first secure the connector into an NPT threaded hole)

- Standard color Gray
- Eliminate inventory, as the swivel design can be substituted for a Straight or 90° connector
- Molded of type nylon 6. Flammability classification 94V-2: temperature index 125°C
- Suitable for indoor/outdoor use
- "O" Ring and steel locknut included

APPLICATIONS

- HVAC equipment
- Machine tools
- Marine equipment
- Motors & controls
- Printing equipment
- Pumps
- Refrigeration equipment
- Transformer connections
- Outdoor lighting

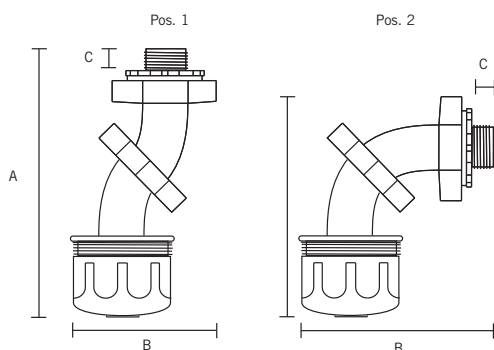

SPECIFICATIONS

Part No.	Product Code	Trade Size	K.O. Size	Std. Pkg.	Weight / Pkg.	Part Dimensions (inches)					
						Pos. 1 Dimension			Pos. 2 Dimension		
						A	B	C	A	B	C
LTMA10	065016	1/2"	1/2"	100	7	3.35	2.15	0.500	3.025	2.395	0.500
LTMA15	065016	3/4"	3/4"	100	7	4.30	2.65	0.520	3.850	3.350	0.520

Available in Black upon request



We build tough products for tough environments®

Toll Free: 1-800-463-9572