

### Sceptalight LED

Sceptalight LEDs provide exceptional lighting for wet and corrosive environments. They can be used in a variety of commercial and industrial applications where durability and water tightness are required. Sceptalight LEDs have been built from durable materials and tested and certified to the latest luminaire and retrofit standards. Sceptalight LEDs provide over 1000 lumens of light output using only 15W of electricity and are dimmable down to 5%.

#### APPLICATION / USE

Sceptalight LEDs are intended for use with non-metallic conduit systems (PVC), designed and approved for indoor and outdoor applications, NEMA 4X and IP66 rated for wash down and corrosive environments.

#### MATERIAL

EPDM (Gasket), Aluminum (Heat Sink), Globe (Polycarbonate)

#### STANDARDS


CSA 22.2 250.0,  
CSA T.I.L. B-79A, UL 1598,  
UL 1598C

#### FLAMMABILITY RATING

5VA

#### ENVIRONMENT RATING

NEMA 4X / IP66

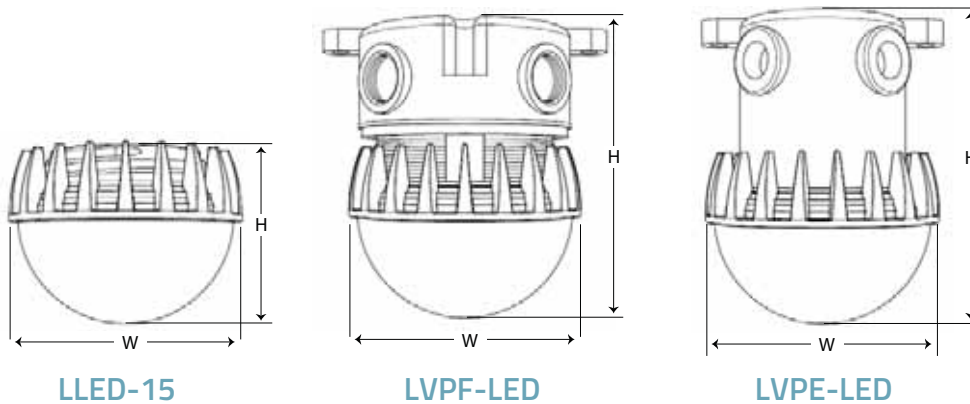


#### Ceiling Mount with Frosted Polycarbonate Globe

Description	Part Number	Product Code	Width	Height	Carton Qty.	Carton Wgt.
15W LED Retrofit Light Engine	LLED-15	277018	5"	3-3/4"	20	9kg/20lbs
15W LED LVPE Heavy Duty Light Fixture	LVPF-LED	277074	5"	5-1/2"	6	4kg/9lbs
15W LED LVPE Utility Light Fixture	LVPE-LED	277075	5"	6-1/2"	6	4kg/9lbs

Lumen Output	1000 lm
Input Voltage	120 VAC
Frequency	60 Hz
Nominal Power	15 W
Color Temperature	5000 K
CRI	> 80

Power Factor	> 0.98
Total Harmonic Distortion	< 10.5%
Operating Temperature	-40°C to 40°C
Dimmability Range	Down to 5%
Rated Life	> 50,000 Hours
* Warranty	5 Years



\* LIMITED WARRANTY & LIMITATION OF LIABILITY:

Consult Kraloy Fittings® Sceptalight™ LED Retrofit Light Engine Specific Terms and Conditions of Sale and Limited Warranty and Limitation of Liability for further details, available at [kraloyfittings.com](http://kraloyfittings.com).