


# **Product Data Sheet**

### Kraloy Hinged Cover Junction Box


Junction boxes and enclosures form an integral part of a circuit protection system and are constructed to provide a degree of protection to personnel against incidental contact with the enclosed equipment and to provide a degree of protection to the enclosed equipment against specified environmental conditions. JBXH boxes are molded of PVC, are entirely non-metallic and provide NEMA Type 1, 2, 3R, 4, 4X, 12, 13 protection.


### **APPLICATION / USE**


JBXH junction boxes are designed and approved for use in indoor/outdoor, industrial, MRO and OEM applications for the accessibility and installation of wire and cable in continuous lengths and to enclose joints and splices. JBXH hinged cover junction boxes can also be used to enclose electrical equipment in non-hazardous locations. The use of a hinged cover box allows for easy access to installed components and protects the contents from the environment.



[311mm] 12.25in 用用用用用 [261mm] 10.26in





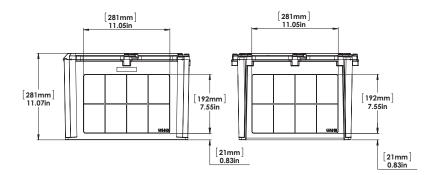

## n Box JBXH141410 | 278407

### MATERIAL

PVC, Valox, Neoprene gasket

STANDARDS UL 50/50E, CSA 94.1/94.2, CSA C22.2 No.85, CSA C22.2 No.40

FLAMABILITY RATING UL 94V-0

OUTDOOR SUITABILITY UL 746C

OPERATING TEMPERATURE -40°C to 50°C

BOX VOLUME 1,916 cu.in/31,400 ml

**NEMA** Type 1, 2, 3R, 4, 4X, 12, 13

**FASTENER TOOL** #2 Phillips screwdriver

#### PACKAGING

Carton Quantity: 1 Carton Weight: 16.5 lbs / 7.5 kg

